


**TANKJET D41800E TANK CLEANING NOZZLE  
FEATURES AND BENEFITS**

- Compact, constant-speed nozzles provide up to four times the impact of conventional rotating nozzles
- Rotating head with three flat sprays is driven by the flow of the cleaning liquid
- Rotates at nearly constant speed over a wide range of fluid pressures
- Slow, controlled rotation provides more dwell time on tank surface, making it perfect for cleaning, sanitizing and foaming applications
- Patented self-flushing water bearing design eliminates internal bearings and races
- ATEX-certified versions available upon request
- Choice of threaded or sanitary pin. Sanitary pin versions conform to 3A sanitary standard 78 for spray cleaning devices to remain in place
- All stainless steel construction provides maximum chemical and wear resistance



**MOUNTING OPTIONS**

Vertical	↑	↓
Horizontal	←	→
45° Up	↖	↗
45° Down	↘	↙

TankJet D41800E constant speed tank cleaning nozzle

**SPECIFICATIONS**

TankJet D41800E Tank Cleaning Nozzle	
Max. tank diameter:	16 ft. (4.9 m)
Operating principle:	Fluid-driven constant speed
Flow rate:	3.0 to 22.8 gpm (11.0 to 86 lpm)
Operating pressure:	30 to 90 psi (2.1 to 6.2 bar)
Max. temperature:	265°F (130°C)
Materials:	303 stainless steel or 316L stainless steel
Rotation speed:	2 to 30 rpm
Inlet connection:	3/8" NPT or BSPT (F), DN19
Optional accessories:	Strainers, recommended mesh size: 200 (74 micron) See page G2




This unit meets the requirements of 3-A Sanitary Standard 78. Spray cleaning devices intended to remain in place.

**IDEAL FOR CLEANING:**

- Chemical processing tanks
- Dry powder tanks
- Food processing tanks
- Mixing tanks
- Pharmaceutical tanks

For lances, mounting kits, adapters and more, see page G6

PERFORMANCE DATA

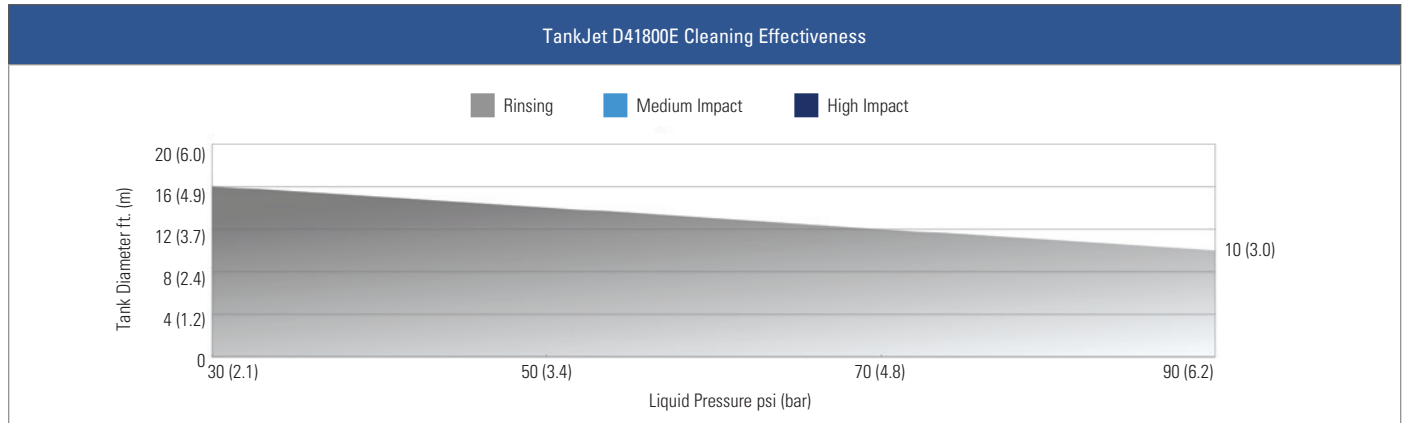

Model	Inlet Conn. Size/Type	Capacity Size	Liquid Flow Capacity gpm (lpm)			
			30 psi (2.1 bar)	50 psi (3.4 bar)	70 psi (4.8 bar)	90 psi (6.2 bar)
D41800E	3/8	3.2	3.0 (11)	3.7 (14)	4.4 (17)	5.0 (19)
		4.5	4.1 (15)	5.2 (20)	6.2 (23)	7.1 (27)
		9.9	8.6 (33)	10.9 (41)	13.0 (49)	14.9 (56)
		13.6	12.4 (47)	15.6 (59)	18.5 (70)	21.1 (80)
	DN19	3.2	4.0 (15)	5.1 (19)	6.1 (23)	7.0 (26)
		4.5	4.6 (17)	5.8 (22)	6.9 (26)	7.9 (30)
		9.9	9.2 (35)	11.6 (44)	13.8 (52)	15.8 (60)
		13.6	13.4 (51)	16.8 (64)	20.0 (76)	22.8 (86)

DIMENSIONS AND WEIGHTS

D41800E Tank Cleaning Nozzle	Model	Inlet Conn.	L in. (mm)	W in. (mm)	A in. (mm)	Pin Hole Dia. in. (mm)	Pin Length in. (mm)	Min. Tank Opening in. (mm)	Weight lbs. (kg)
	D41800E	3/8"	3.1 (78)	1.2 (30)	0.84 (21.2)	-	-	1.25 (31)	0.28 (0.13)
		DN19	3.2 (82)	1.2 (30)	0.85 (21.6)	0.76 (19.2)	1.8 (46)	1.87 (47.5)	0.29 (0.13)
	D41800E-3A	DN19	3.2 (82)	1.2 (30)	0.85 (21.6)	0.76 (19.2)	1.8 (46)	1.87 (47.5)	0.29 (0.13)

ORDERING INFORMATION

TANKJET D41800E TANK CLEANING NOZZLE

Model	Inlet Conn.*	Material Code**	Capacity Size	EXAMPLE
				D41800E - 3/8 - SS 9.9

TANKJET D41800E-3A TANK CLEANING NOZZLE

Model	Inlet Conn. Size/Type*	Material Code**	Capacity Size	3A Version†	EXAMPLE
					D41800E - 19 - 316L 9.9 - 3A

\*Add B prior to the inlet connection for BSPT connections.

\*\* Materials: Specify SS for Stainless Steel Type 303 (DIN1.4305). Specify 316L for Stainless Steel Type 316L (DIN1.4404).

†Leave blank for standard version.

